


# T57


## Profilo curvo in alluminio coibentato

Insulated aluminum curved profile

Profil courbé en aluminium mousse

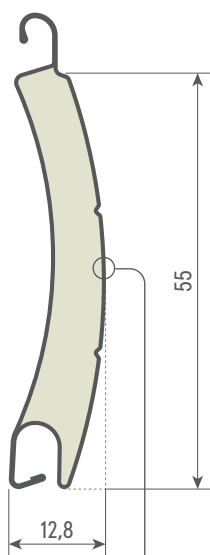

~ 0,328 mm




### Caratteristiche

Features / Caractéristiques

<b>Dimensioni</b> / Dimensions / Dimensions	mm	12,8 x 55
<b>Peso al mq</b> / Weight for sqm / Poids au m <sup>2</sup>	kg	~ 3,2
<b>Profili per mt di altezza</b> / Profiles for meter in height / Profils pour un mètre de hauteur	n	18

### Asolatura / Hole / Trou






<b>ALLUMINIO</b> / ALUMINUM / ALUMINIUM	mm	~ 0,30
<b>PRIMER</b> / PRIMER / PRIMAIRE	µm	~ 4 + 4
<b>VERNICE CON PROTEZIONE UV</b> / PAINT UV PROTECTION / PEINTURE AVEC PROTECTION UV (*)	µm	~ 20
<b>(*) LACCATURA SU VERNICE PER TINTE LEGNO E COLORI SPECIALI</b> VARNISH FOR WOOD IMITATION AND SPECIAL COLOURS / LAQUAGE POUR IMITATION BOIS ET COULEURS SPECIALES	µm	~ 2
<b>DENSITÀ POLIURETANO</b> / POLYURETHANE DENSITY / DENSITÉ POLYURÉTHANE	kg/m <sup>3</sup>	~ 65

### Imballaggio e codici


Packaging and codes / Emballage et codes

Tipologia / Typology / Typologie	n	L	📦	Codice / Art / Reference	
					Colore / Color / Couleur
≡ Profili / Profiles / Profils	30	6,5 mtl	195 mtl	<b>T57 650</b>	**
≡ Profili / Profiles / Profils	30	5,8 mtl	174 mtl	<b>T57 580</b>	**
☉ Teli / Shutter / Volet	-	-	-	<b>T57 222</b>	**


GUIDE / GUIDES / COULISSES




P24




P26



PS250



PS300




TERMINALI / END SLATS / LAME FINALES


TM41





TM55




TM57



GUARNIZIONI / GASKET / JOINT



GUARNIZIONI / GASKET / JOINT



ASSEMBLAGGIO TAPPARELLA CON TAPPI:  
SHUTTERS ASSEMBLING WITH SIDE PLUGS:  
ASSEMBLAGE DU VOLET AVEC BOUCHONS:



STANDARD  
STANDARD / STANDARD

909.57M

TAPPO ANTIUSURA E ANTIRUMORE  
ANTI-WEARING AND ANTINOISE PLUG  
BOUCHON ANTI-USURE ET ANTI-BRUIT



A SORMONTO  
OVERLAP / RECOUVREMENT


909.575C

TAPPO ANTIUSURA E ANTIRUMORE  
ANTI-WEARING AND ANTINOISE PLUG  
BOUCHON ANTI-USURE ET ANTI-BRUIT


Installazione

Installation / Installation


H	Ø 60 mm		Ø 70 mm	
	D	D	D	D
mm	mm	mm	mm	mm
1000	137	135	150	145
1200	150	145	165	150
1400	165	160	180	170
1600	180	170	205	195
1800	180	175	205	195
2000	185	185	205	195
2200	190	190	205	195
2400	195	195	205	195
2600	200	200	205	195
2800	205	205	205	195
3000	210	210	205	195



Dimensione massima / Maximum size / Taille maximale

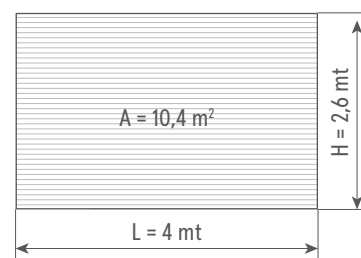

CODICI COLORI / COLOR CODES / COULEURS DISPONIBLES

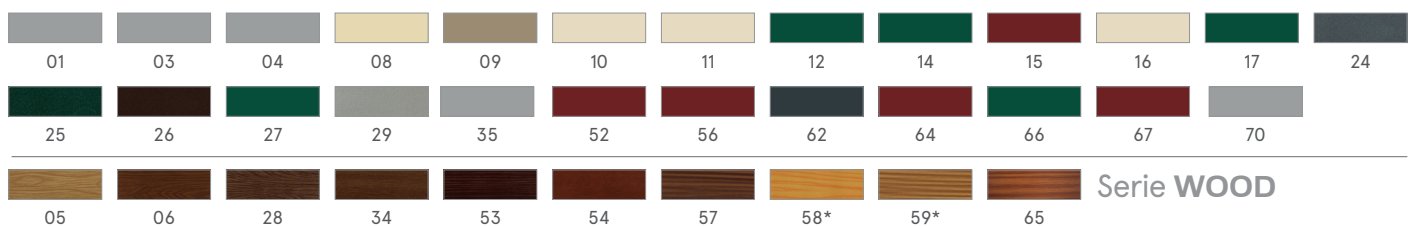

\* Per colori particolari verificare la disponibilità a magazzino / For particular colors, please check availability in stock / Pour couleurs particuliers, il faut vérifier la disponibilité.